



POMPE SMT E SMT-16B

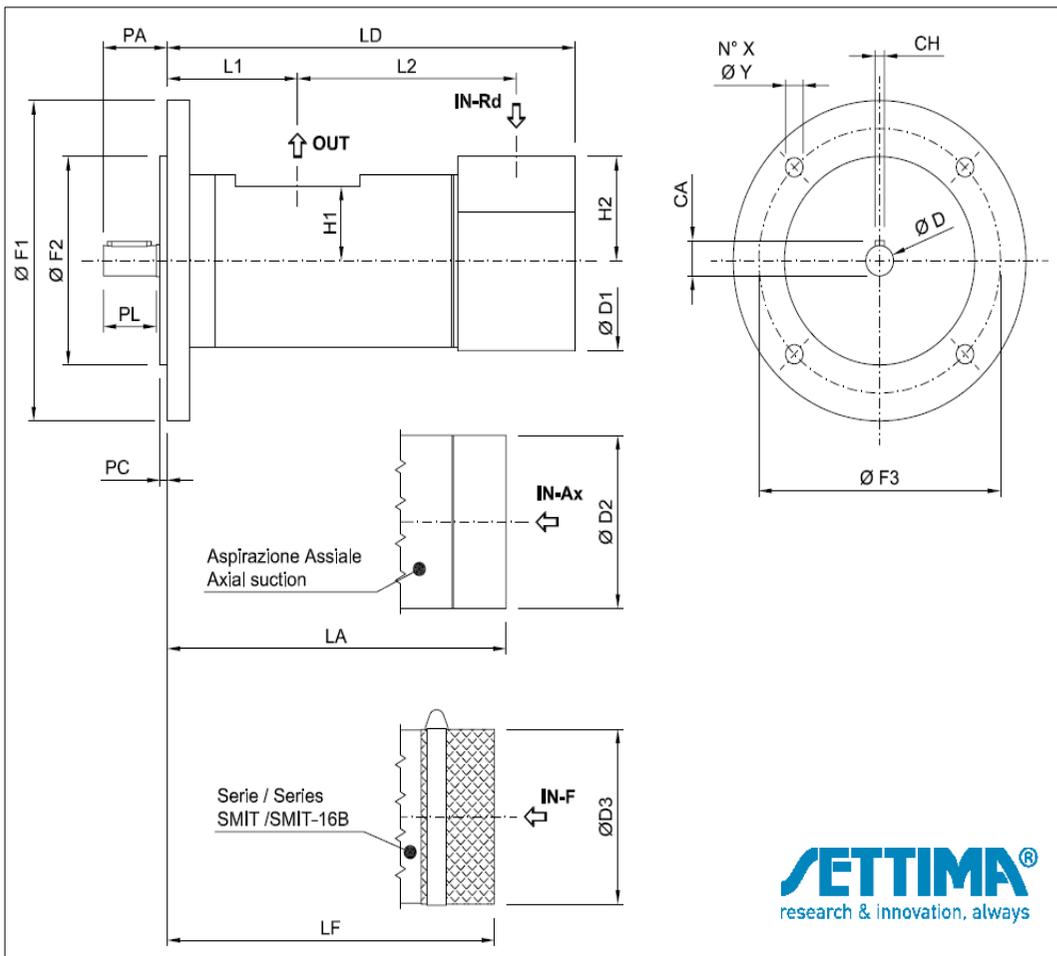


SETTIMA®
research & innovation, always

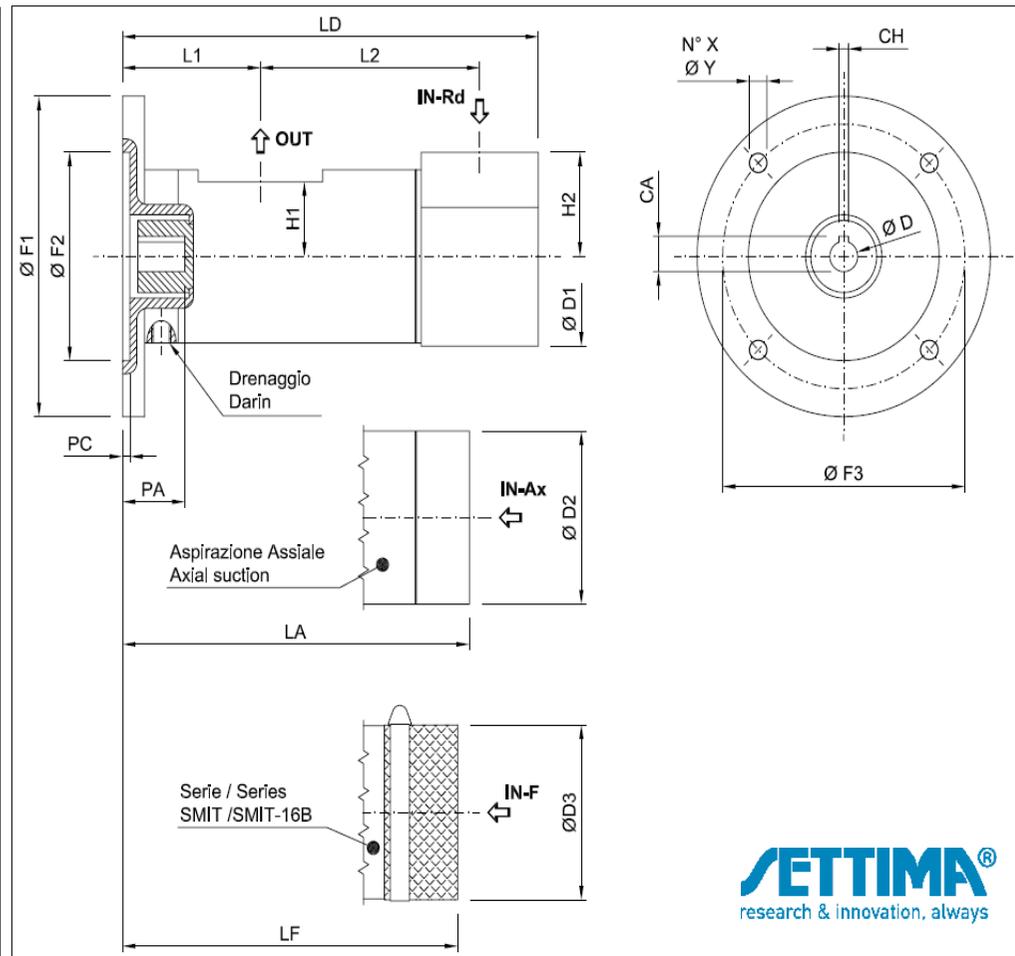


SETTIMA®
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF | |
|----------------------|------------|-------|-------|-------|---|------|-----|------|------|------|------|------|-----|------|------|----------|----------|----------|----------|------|------|-------|-------|-------|-------|-------|
| GR20_SMT-16B | 8-12-15-23 | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 14,0 | 59,0 | 59,0 | 60,0 | 16,0 | 5,0 | 37,0 | 30,0 | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 53,0 | 78,5 | 153,0 | 134,0 | 133,0 | |
| GR20_SMT-16B_TM | | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 14,0 | 59,0 | 59,0 | 60,0 | 16,0 | 5,0 | 37,0 | 30,0 | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 91,5 | 78,5 | 191,5 | 172,5 | 171,5 | |
| GR20_SMT-16B_AC11-B5 | | 140,0 | 95,0 | 115,0 | 4 | 9,0 | 4,0 | 11,0 | 59,0 | 59,0 | 60,0 | 12,8 | 4,2 | 25,0 | | | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 57,0 | 78,5 | 157,0 | 138,0 | 137,0 |
| GR20_SMT-16B_AC14-B5 | | 160,0 | 110,0 | 130,0 | 4 | 9,5 | 4,0 | 14,0 | 59,0 | 59,0 | 60,0 | 16,1 | 5,2 | 33,5 | | | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 56,0 | 78,5 | 156,0 | 137,0 | 136,0 |
| GR20_SMT-16B_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 11,0 | 5,0 | 19,0 | 59,0 | 59,0 | 60,0 | 21,7 | 6,5 | 42,0 | | | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 75,0 | 78,5 | 175,0 | 156,0 | 155,0 |
| GR20_SMT | 8-12-15-23 | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 14,0 | 59,0 | 59,0 | 60,0 | 16,0 | 5,0 | 37,0 | 30,0 | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 53,0 | 118,5 | 193,0 | 174,0 | 173,0 | |
| GR20_SMT_TM | | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 14,0 | 59,0 | 59,0 | 60,0 | 16,0 | 5,0 | 37,0 | 30,0 | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 91,5 | 118,5 | 231,5 | 212,5 | 211,5 | |
| GR20_SMT_AC11-B5 | | 140,0 | 95,0 | 115,0 | 4 | 9,0 | 4,0 | 11,0 | 59,0 | 59,0 | 60,0 | 12,8 | 4,2 | 25,0 | | | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 57,0 | 118,5 | 197,0 | 178,0 | 177,0 |
| GR20_SMT_AC14-B5 | | 160,0 | 110,0 | 130,0 | 4 | 9,5 | 4,0 | 14,0 | 59,0 | 59,0 | 60,0 | 16,1 | 5,2 | 33,5 | | | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 56,0 | 118,5 | 196,0 | 177,0 | 176,0 |
| GR20_SMT_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 11,0 | 5,0 | 19,0 | 59,0 | 59,0 | 60,0 | 21,7 | 6,5 | 42,0 | | | 1/2" GAS | 1/2" GAS | 1/2" GAS | 25,0 | 26,0 | 75,0 | 118,5 | 215,0 | 196,0 | 195,0 |
| GR25_SMT-16B | | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 19,0 | 65,0 | 65,0 | 66,0 | 21,5 | 6,0 | 42,0 | 36,0 | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 72,5 | 87,0 | 178,0 | 178,0 | 158,5 | |

POMPE SMT E SMT-16B

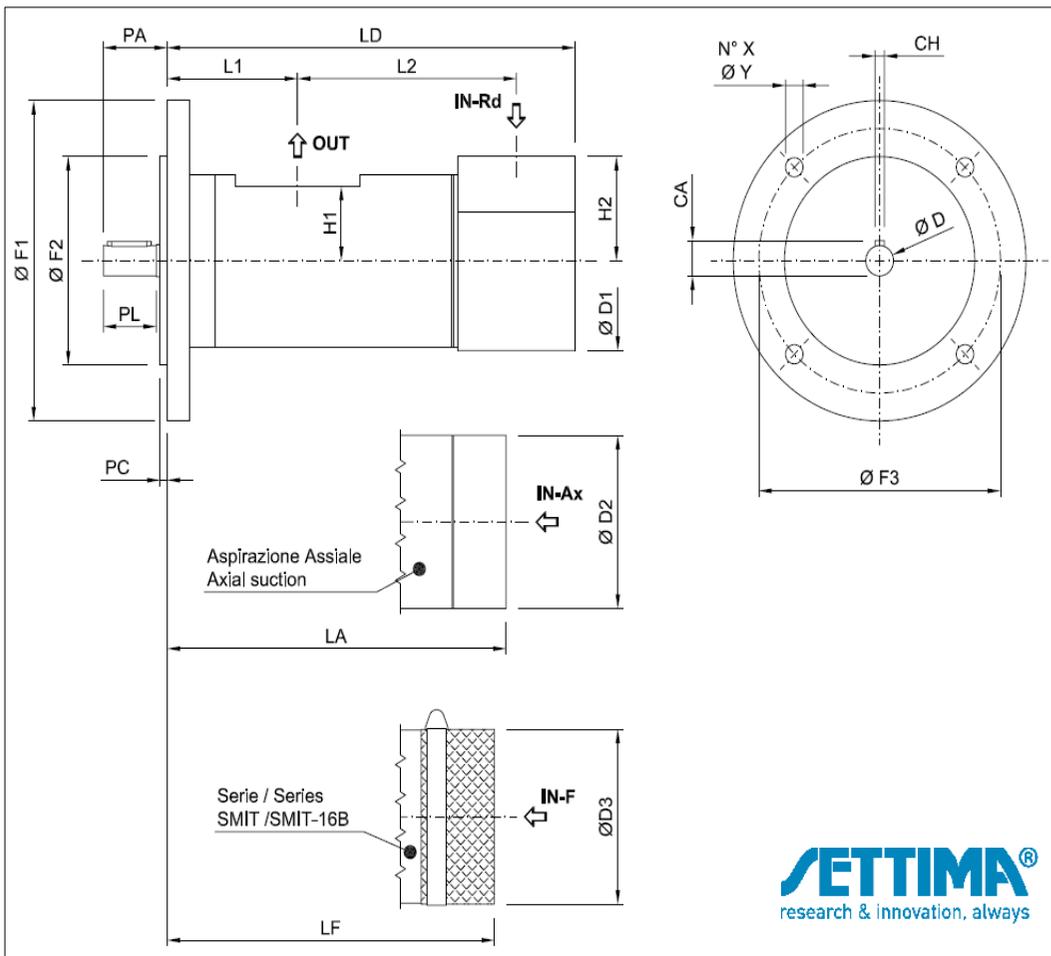


SETTIMA
research & innovation, always

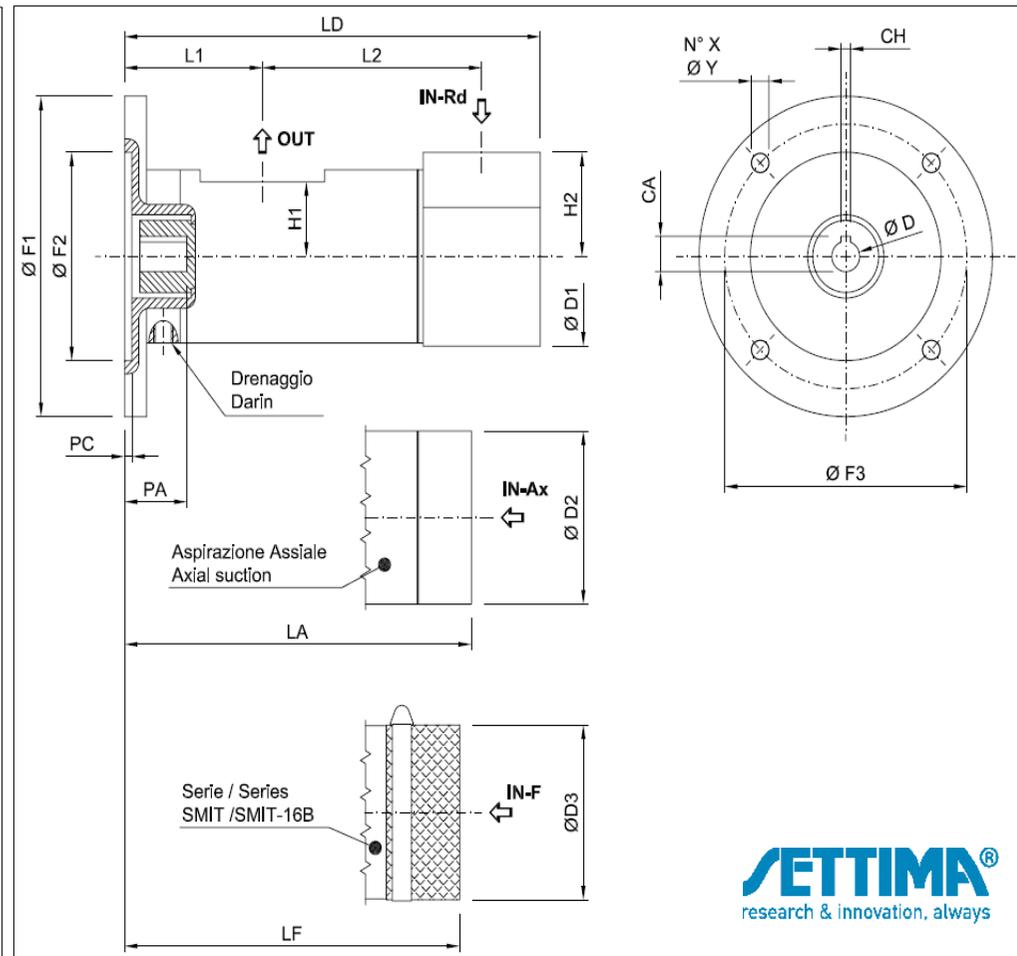


SETTIMA
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF |
|----------------------|-------------|-------|-------|-------|---|------|-----|------|------|------|------|------|-----|------|------|-----------------|------------|-------------|------|------|-------|-------|-------|-------|-------|
| GR25_SMT-16B_TM | 25-30 | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 19,0 | 65,0 | 65,0 | 66,0 | 21,5 | 6,0 | 42,0 | 36,0 | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 111,5 | 87,0 | 217,0 | 217,0 | 197,5 |
| GR25_SMT-16B_AC14-B5 | | 160,0 | 110,0 | 130,0 | 4 | 9,5 | 4,0 | 14,0 | 65,0 | 65,0 | 66,0 | 16,2 | 5,2 | 32,5 | | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 73,5 | 87,0 | 179,0 | 179,0 | 159,5 |
| GR25_SMT-16B_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 10,5 | 4,5 | 19,0 | 65,0 | 65,0 | 66,0 | 21,9 | 6,5 | 42,5 | | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 76,5 | 87,0 | 182,0 | 182,0 | 162,5 |
| GR25_SMT | 25-30 | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 19,0 | 65,0 | 65,0 | 66,0 | 21,5 | 6,0 | 42,0 | 36,0 | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 72,5 | 171,0 | 262,0 | 262,0 | 242,5 |
| GR25_SMT_TM | | 125,0 | 80,0 | 103,0 | 2 | 11,0 | 4,5 | 19,0 | 65,0 | 65,0 | 66,0 | 21,5 | 6,0 | 42,0 | 36,0 | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 111,5 | 171,0 | 301,0 | 301,0 | 281,5 |
| GR25_SMT_AC14-B5 | | 160,0 | 110,0 | 130,0 | 4 | 9,5 | 4,0 | 14,0 | 65,0 | 65,0 | 66,0 | 16,2 | 5,2 | 32,5 | | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 73,5 | 171,0 | 263,0 | 263,0 | 243,5 |
| GR25_SMT_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 10,5 | 4,5 | 19,0 | 65,0 | 65,0 | 66,0 | 21,9 | 6,5 | 42,5 | | 3/4" GAS | 3/4" GAS | 1/2" GAS | 27,5 | 27,0 | 76,5 | 171,0 | 266,0 | 266,0 | 246,5 |
| GR32_SMT-16B | 35-45-55-75 | 150,0 | 100,0 | 125,0 | 4 | 11,0 | 4,0 | 19,0 | 96,0 | 94,0 | 95,0 | 21,5 | 6,0 | 41,0 | 35,0 | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 61,0 | 123,0 | 218,0 | 171,0 | 162,0 |
| GR32_SMT-16B_TM | | 150,0 | 100,0 | 125,0 | 4 | 11,0 | 4,0 | 19,0 | 96,0 | 94,0 | 95,0 | 21,5 | 6,0 | 41,0 | 35,0 | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 101,0 | 123,0 | 258,0 | 211,0 | 202,0 |
| GR32_SMT-16B_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 19,0 | 96,0 | 94,0 | 95,0 | 21,9 | 6,5 | 43,7 | | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 84,7 | 123,0 | 241,7 | 194,7 | 185,7 |
| GR32_SMT-16B_AC24-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 24,0 | 96,0 | 94,0 | 95,0 | 27,3 | 8,5 | 52,7 | | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 84,7 | 123,0 | 241,7 | 194,7 | 185,7 |

POMPE SMT E SMT-16B

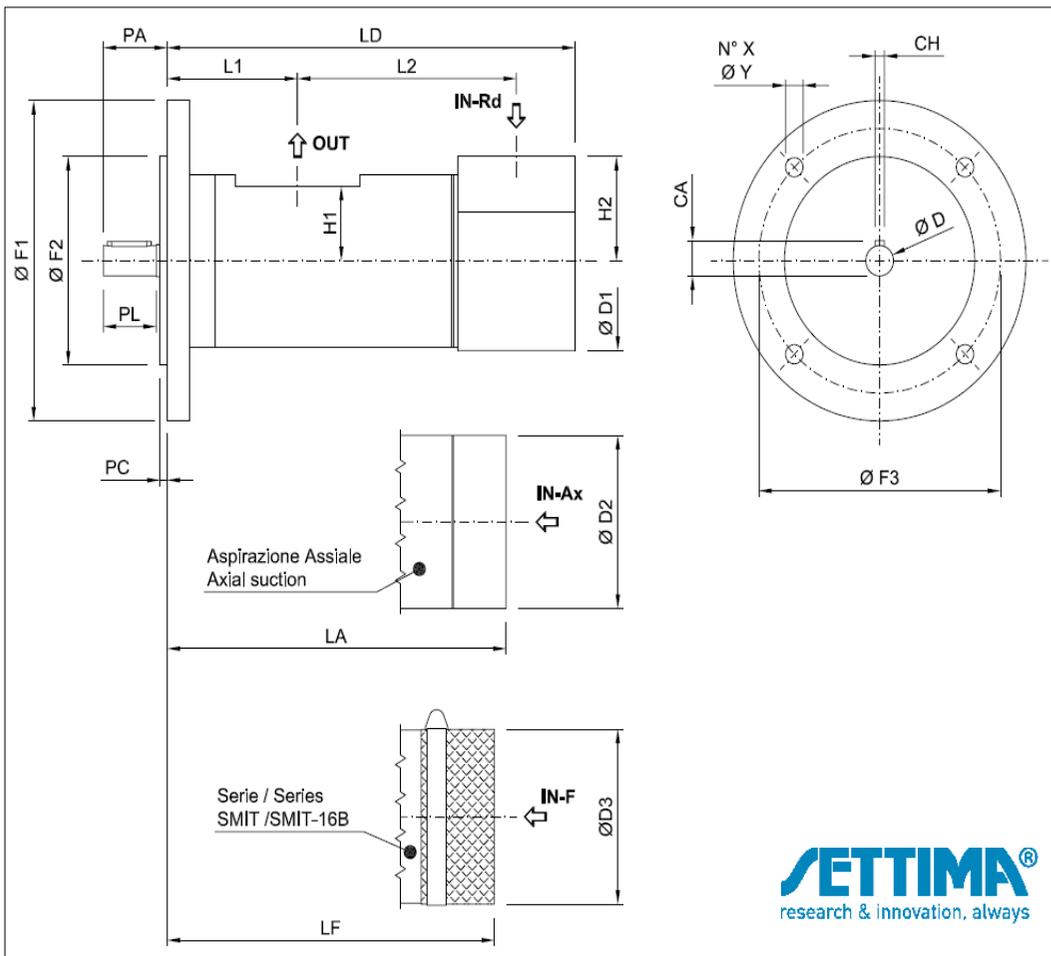


SETTIMA®
research & innovation, always

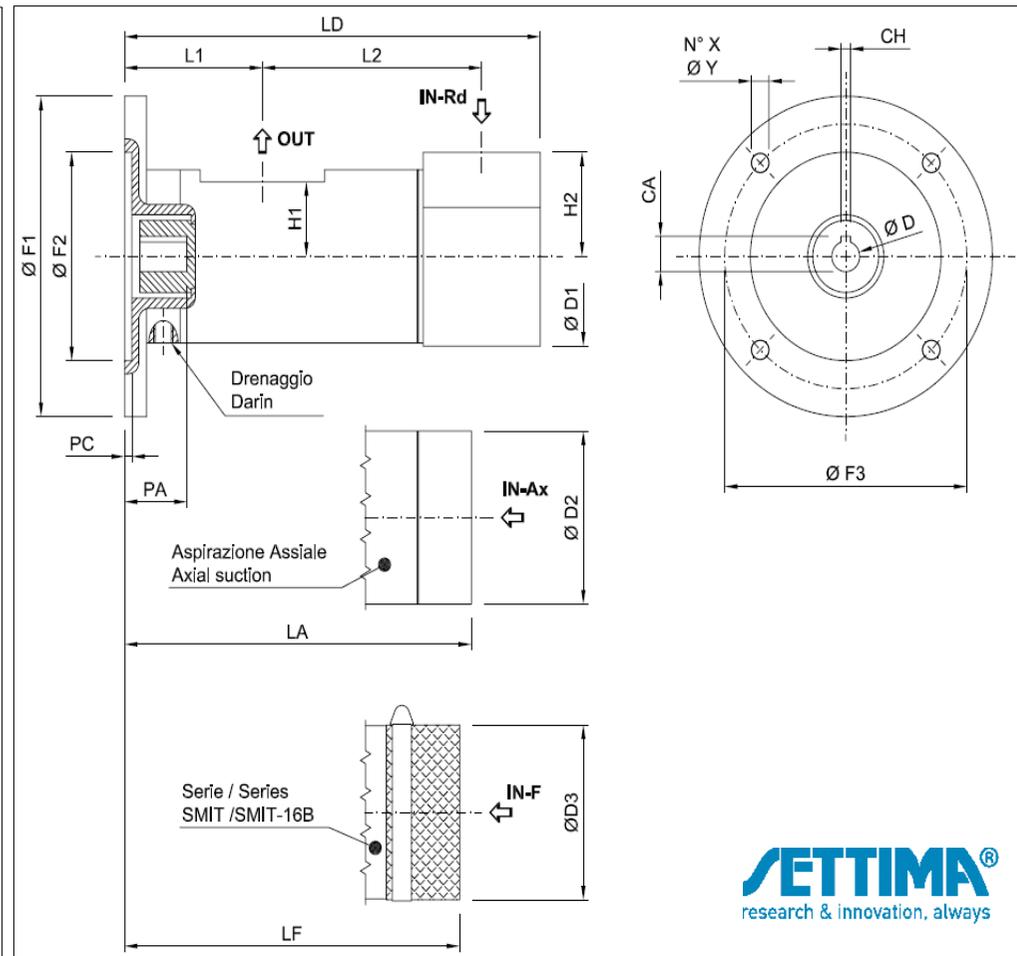


SETTIMA®
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF | |
|----------------------|-------------|-------|-------|-------|---|------|-----|------|-------|-------|-------|------|-----|------|------|-----------------|-----------------|-----------------|-----------------|------|-------|-------|-------|-------|-------|-------|
| GR32_SMT | 35-45-55-75 | 150,0 | 100,0 | 125,0 | 4 | 11,0 | 4,0 | 19,0 | 96,0 | 94,0 | 95,0 | 21,5 | 6,0 | 41,0 | 35,0 | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 69,0 | 192,0 | 295,0 | 248,0 | 239,0 | |
| GR32_SMT_TM | | 150,0 | 100,0 | 125,0 | 4 | 11,0 | 4,0 | 19,0 | 96,0 | 94,0 | 95,0 | 21,5 | 6,0 | 41,0 | 35,0 | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 109,0 | 192,0 | 335,0 | 288,0 | 279,0 | |
| GR32_SMT_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 19,0 | 96,0 | 94,0 | 95,0 | 21,9 | 6,5 | 43,7 | | | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 92,7 | 192,0 | 318,7 | 271,7 | 262,7 |
| GR32_SMT_AC24-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 24,0 | 96,0 | 94,0 | 95,0 | 27,3 | 8,5 | 52,7 | | | 1" 1/4 SAE-3000 | 1" 1/4 GAS | 1" SAE-3000 | 41,0 | 55,0 | 92,7 | 192,0 | 318,7 | 271,7 | 262,7 |
| GR40_SMT-16B | 100-125-150 | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 19,0 | 112,0 | 108,0 | 109,0 | 21,5 | 6,0 | 42,5 | 36,0 | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 69,0 | 149,5 | 257,5 | 211,5 | 203,5 | |
| GR40_SMT-16B_TM | | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 19,0 | 112,0 | 108,0 | 109,0 | 21,5 | 6,0 | 42,5 | 36,0 | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 110,0 | 149,5 | 298,5 | 252,5 | 244,5 | |
| GR40_SMT-16B_AC19-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 19,0 | 112,0 | 108,0 | 109,0 | 22,0 | 6,5 | 42,5 | | | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 94,0 | 149,5 | 282,5 | 236,5 | 228,5 |
| GR40_SMT-16B_Ac24-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 24,0 | 112,0 | 108,0 | 109,0 | 27,5 | 8,5 | 52,5 | | | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 94,0 | 149,5 | 282,5 | 236,5 | 228,5 |
| GR40_SMT-16B_Ac28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 6,0 | 28,0 | 112,0 | 108,0 | 109,0 | 31,5 | 8,5 | 64,0 | | | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 104,5 | 149,5 | 293,0 | 247,0 | 239,0 |
| GR40_SMT | | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 19,0 | 112,0 | 108,0 | 109,0 | 21,5 | 6,0 | 39,5 | 34,0 | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 84,5 | 224,5 | 348,0 | 302,0 | 294,0 | |
| GR40_SMT_TM | | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 19,0 | 112,0 | 108,0 | 109,0 | 21,5 | 6,0 | 41,5 | 35,0 | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 125,5 | 224,5 | 389,0 | 343,0 | 335,0 | |

POMPE SMT E SMT-16B

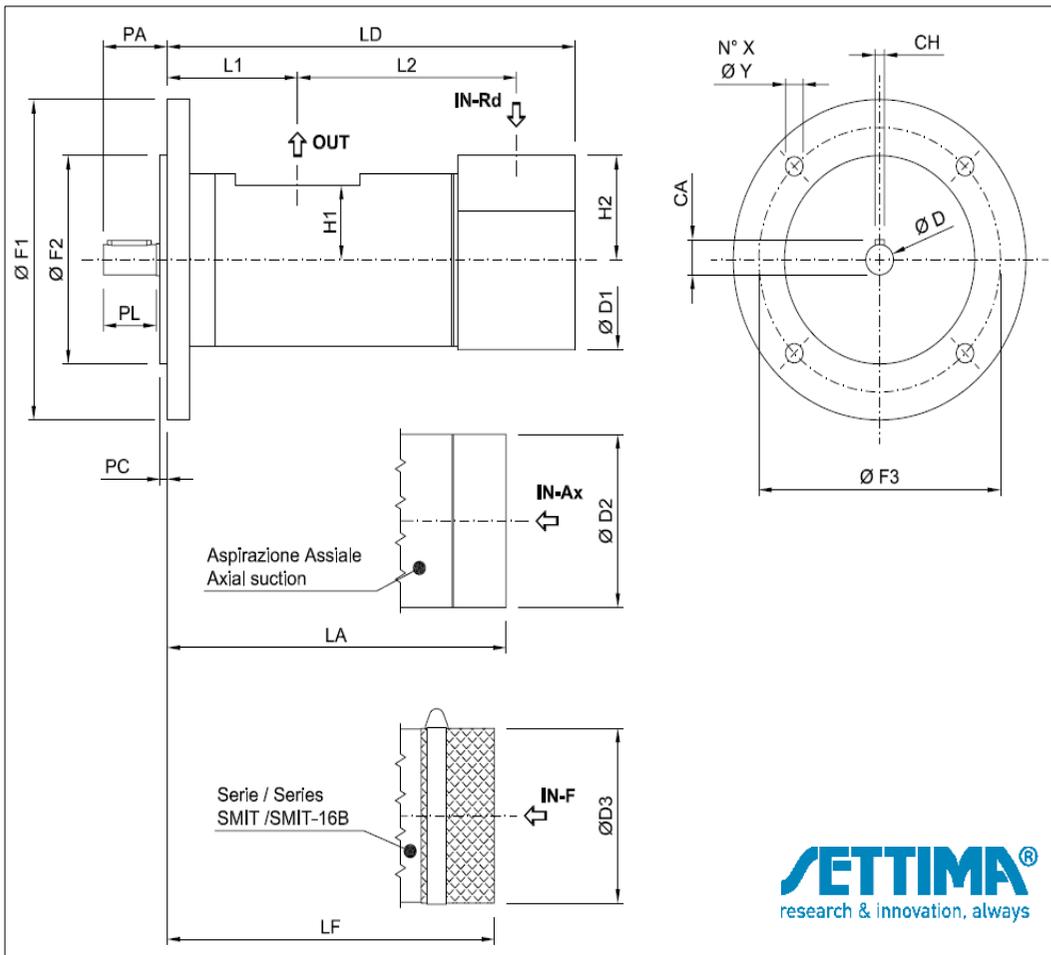


SETTIMA
research & innovation, always

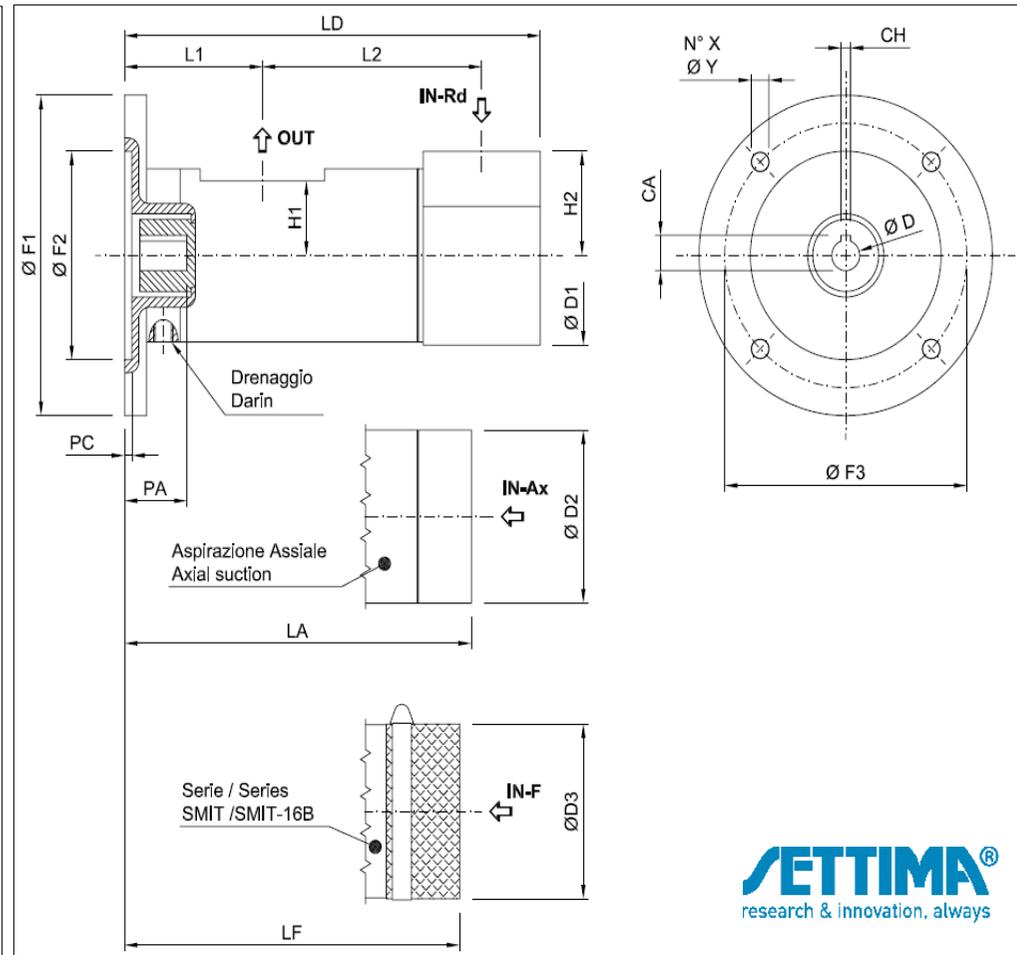


SETTIMA
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF |
|----------------------|-------------|-------|-------|-------|---|------|-----|------|-------|-------|-------|------|------|------|------|-----------------|------------|-----------------|------|------|-------|-------|-------|-------|-------|
| GR40_SMT_AC19-B5 | 100-125-150 | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 19,0 | 112,0 | 108,0 | 109,0 | 22,0 | 6,5 | 42,5 | | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 109,5 | 224,5 | 373,0 | 327,0 | 319,0 |
| GR40_SMT_AC24-B5 | | 200,0 | 130,0 | 165,0 | 4 | 12,0 | 5,0 | 24,0 | 112,0 | 108,0 | 109,0 | 27,5 | 8,5 | 52,5 | | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 109,5 | 224,5 | 373,0 | 327,0 | 319,0 |
| GR40_SMT_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 6,0 | 28,0 | 112,0 | 108,0 | 109,0 | 31,5 | 8,5 | 64,0 | | 1" 1/2 SAE-3000 | 1" 1/2 GAS | 1" 1/4 SAE-3000 | 46,5 | 65,0 | 120,0 | 224,5 | 383,5 | 337,5 | 329,5 |
| GR45_SMT-16B | 180-210 | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 32,0 | 125,0 | 122,5 | 123,5 | 35,0 | 10,0 | 64,5 | 55,0 | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 75,4 | 190,1 | 310,5 | 258,5 | 240,5 |
| GR45_SMT-16B_TM | | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 32,0 | 125,0 | 122,5 | 123,5 | 35,0 | 10,0 | 64,5 | 55,0 | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 116,4 | 190,1 | 351,5 | 299,5 | 281,5 |
| GR45_SMT-16B_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 5,0 | 28,0 | 125,0 | 122,5 | 123,5 | 31,5 | 8,5 | 63,5 | | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 106,4 | 190,1 | 341,5 | 289,5 | 271,5 |
| GR45_SMT-16B_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 15,0 | 6,0 | 38,0 | 125,0 | 122,5 | 123,5 | 42,0 | 10,5 | 81,0 | | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 119,9 | 190,1 | 355,0 | 303,0 | 285,0 |
| GR45_SMT | 180-210 | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 32,0 | 125,0 | 122,5 | 123,5 | 35,0 | 10,0 | 64,5 | 55,0 | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 89,0 | 248,0 | 382,0 | 330,0 | 312,0 |
| GR45_SMT_TM | | 188,0 | 125,0 | 160,0 | 4 | 14,0 | 4,0 | 32,0 | 125,0 | 122,5 | 123,5 | 35,0 | 10,0 | 64,5 | 55,0 | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 130,0 | 248,0 | 423,0 | 371,0 | 353,0 |
| GR45_SMT_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 5,0 | 28,0 | 125,0 | 122,5 | 123,5 | 31,5 | 8,5 | 63,5 | | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 120,0 | 248,0 | 413,0 | 361,0 | 343,0 |
| GR45_SMT_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 15,0 | 6,0 | 38,0 | 125,0 | 122,5 | 123,5 | 42,0 | 10,5 | 81,0 | | 2" SAE-3000 | 2" GAS | 1" 1/2 SAE-3000 | 51,5 | 85,0 | 133,5 | 248,0 | 426,5 | 374,5 | 356,5 |

POMPE SMT E SMT-16B

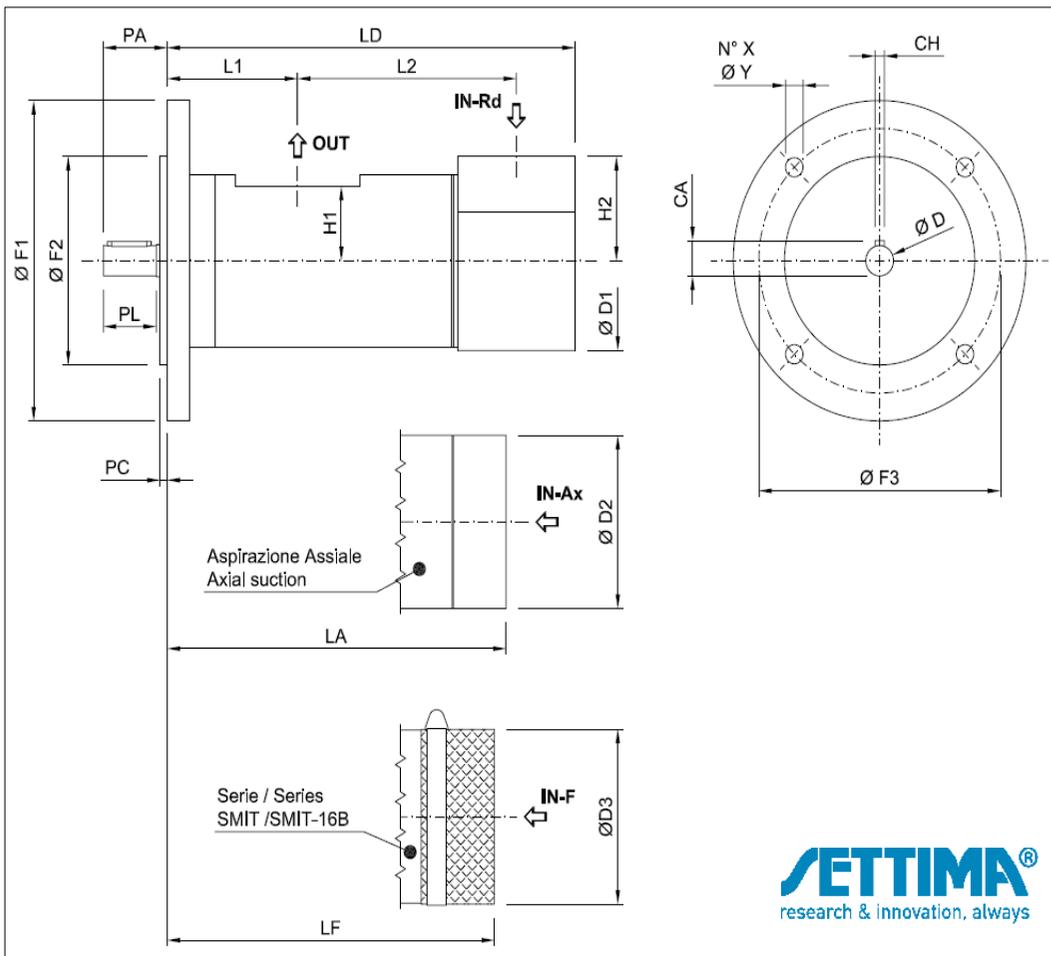


SETTIMA®
research & innovation, always

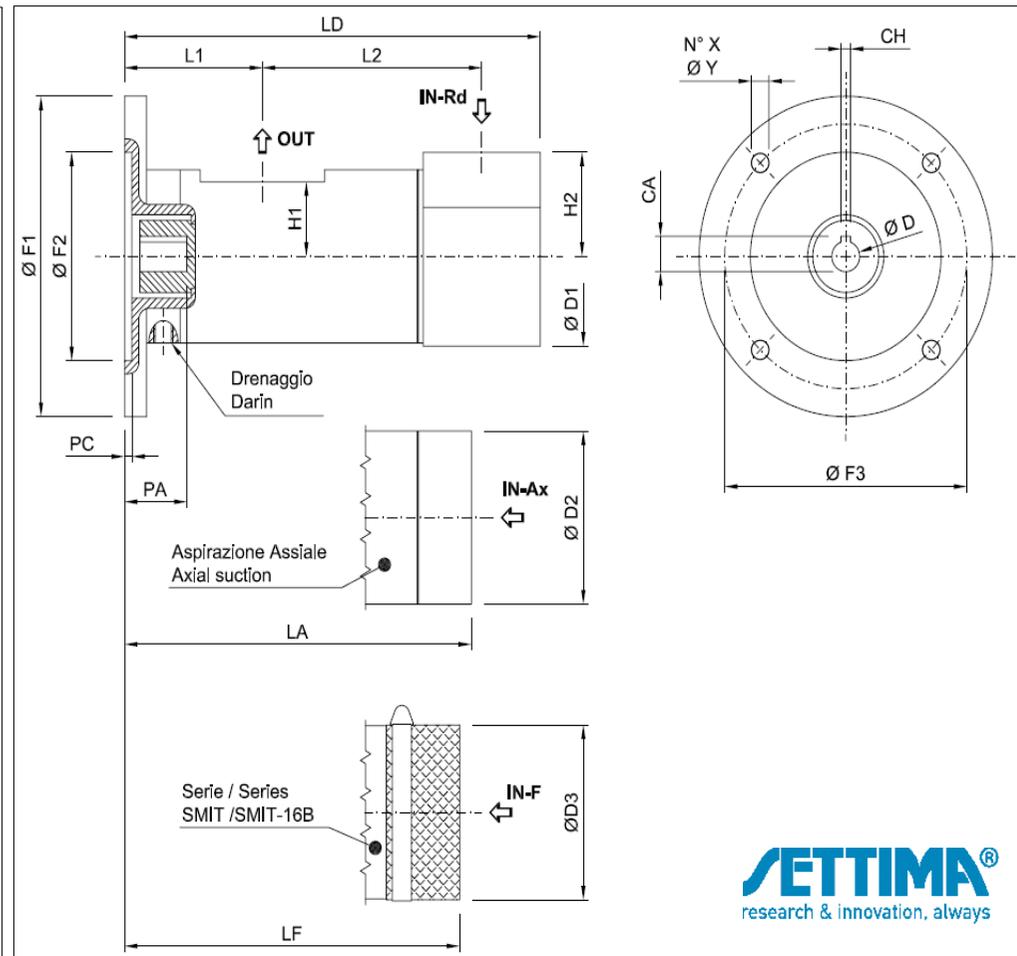


SETTIMA®
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF |
|----------------------|-----------------|-------|-------|-------|---|------|-----|------|-------|-------|-------|------|------|------|------|-----------------|------------|-----------------|------|-------|-------|-------|-------|-------|-------|
| GR55_SMT-16B | 250-300-330-380 | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 148,0 | 142,5 | 143,5 | 35,0 | 10,0 | 64,5 | 55,0 | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 83,5 | 202,5 | 338,0 | 274,0 | 284,0 |
| GR55_SMT-16B_TM | | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 148,0 | 142,5 | 143,5 | 35,0 | 10,0 | 65,0 | 55,0 | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 126,0 | 202,5 | 380,5 | 316,5 | 326,5 |
| GR55_SMT-16B_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 6,0 | 28,0 | 148,0 | 142,5 | 143,5 | 31,5 | 8,5 | 62,5 | | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 108,5 | 202,5 | 363,0 | 299,0 | 309,0 |
| GR55_SMT-16B_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 15,0 | 6,0 | 38,0 | 148,0 | 142,5 | 143,5 | 42,0 | 10,5 | 82,5 | | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 128,5 | 202,5 | 383,0 | 319,0 | 329,0 |
| GR55_SMT | 250-300-330-380 | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 148,0 | 142,5 | 143,5 | 35,0 | 10,0 | 61,5 | 55,0 | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 100,5 | 297,0 | 449,5 | 385,5 | 395,5 |
| GR55_SMT_TM | | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 148,0 | 142,5 | 143,5 | 35,0 | 10,0 | 64,5 | 55,0 | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 143,0 | 297,0 | 492,0 | 428,0 | 438,0 |
| GR55_SMT_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 6,0 | 28,0 | 148,0 | 142,5 | 143,5 | 31,5 | 8,5 | 62,5 | | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 125,5 | 297,0 | 474,5 | 410,5 | 420,5 |
| GR55_SMT_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 15,0 | 6,0 | 38,0 | 148,0 | 142,5 | 143,5 | 42,0 | 10,5 | 82,5 | | 2" 1/2 SAE-3000 | 2" 1/2 GAS | 2" SAE-3000 | 55,0 | 95,0 | 145,5 | 297,0 | 494,5 | 430,5 | 440,5 |
| GR60_SMT-16B | 440-500 | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 160,0 | 155,0 | 154,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 83,5 | 228,5 | 374,5 | 292,5 | 299,5 |
| GR60_SMT-16B_TM | | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 160,0 | 155,0 | 154,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 126,0 | 228,5 | 417,0 | 335,0 | 342,0 |
| GR60_SMT-16B_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 6,0 | 28,0 | 160,0 | 155,0 | 154,0 | 31,5 | 8,5 | 65,0 | | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 108,5 | 228,5 | 399,5 | 317,5 | 324,5 |

POMPE SMT E SMT-16B

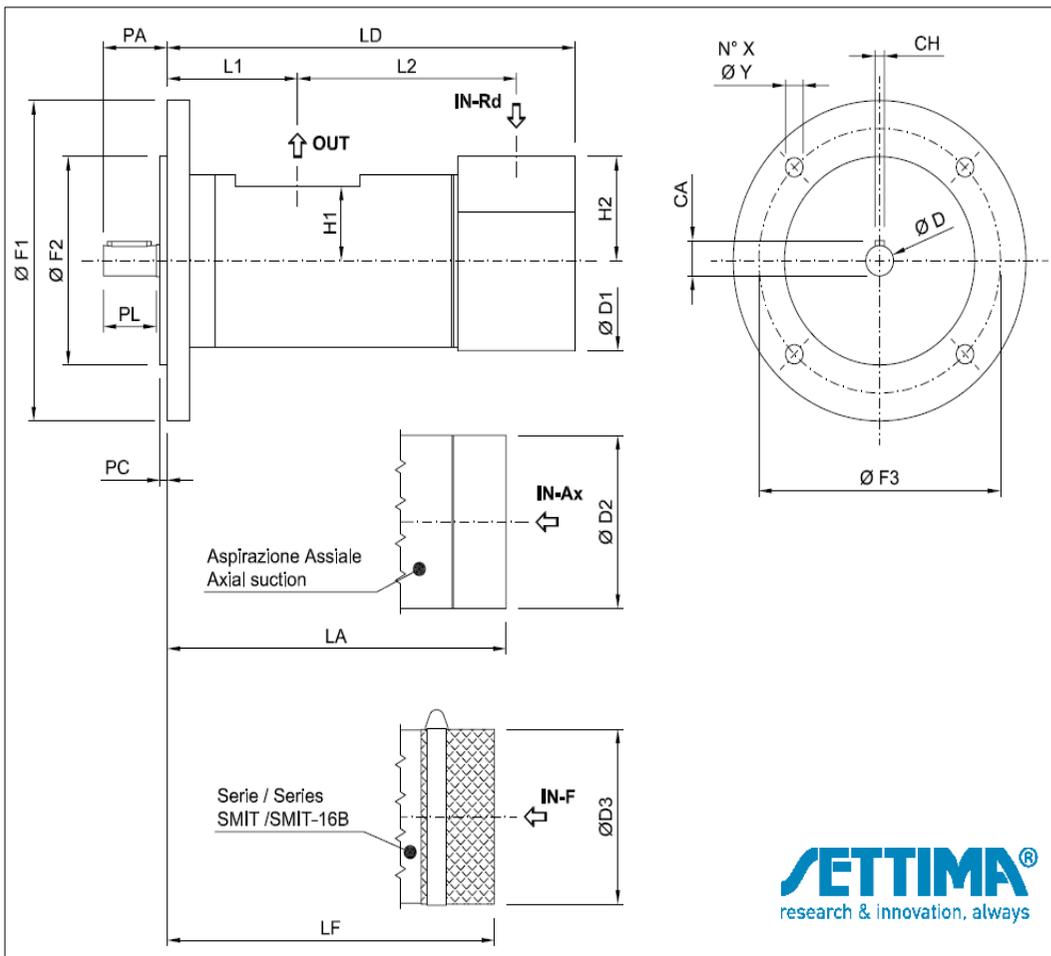


SETTIMA
research & innovation, always

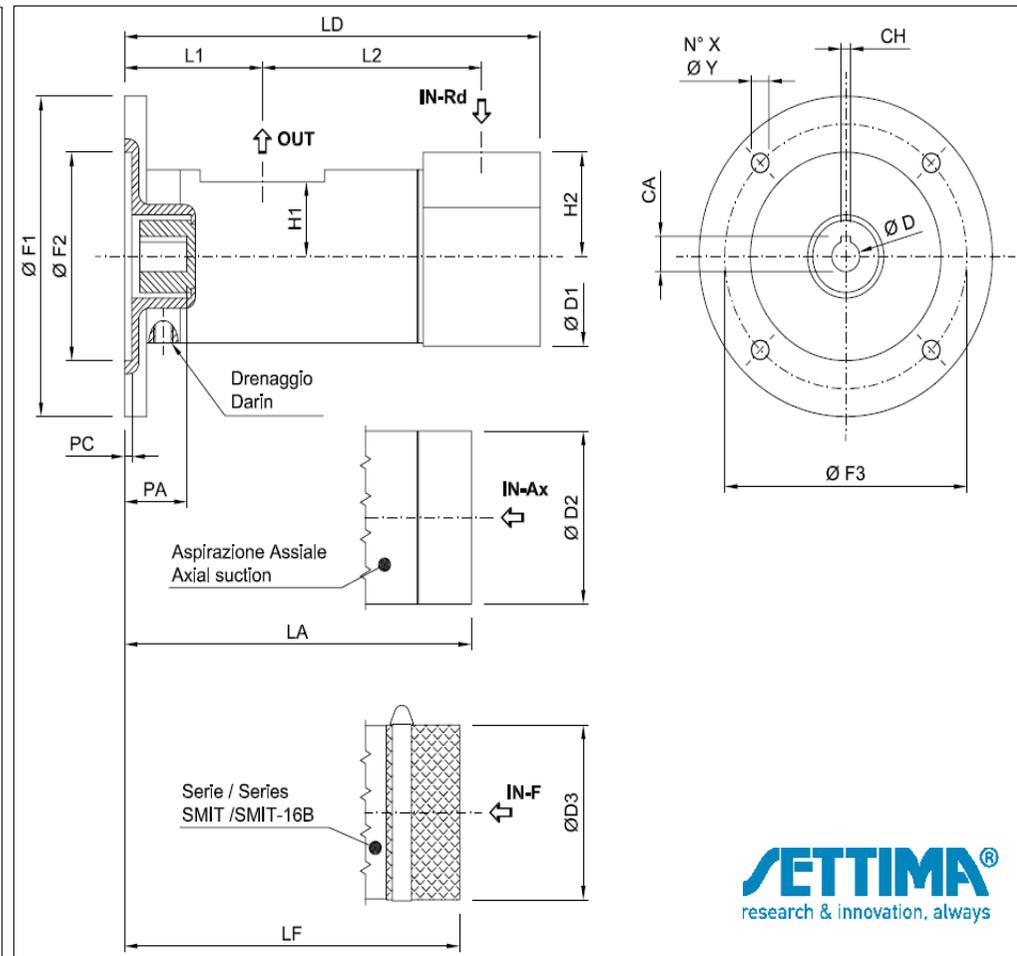


SETTIMA
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF |
|----------------------|-------------|-------|-------|-------|---|------|-----|------|-------|-------|-------|------|------|------|------|-----------------|------------|-----------------|------|-------|-------|-------|-------|-------|-------|
| GR60_SMT-16B_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 14,5 | 6,0 | 38,0 | 160,0 | 155,0 | 154,0 | 41,8 | 10,5 | 83,0 | | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 128,5 | 228,5 | 419,5 | 337,5 | 344,5 |
| GR60_SMT | 440-500 | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 160,0 | 155,0 | 154,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 101,0 | 342,0 | 505,5 | 423,5 | 430,5 |
| GR60_SMT_TM | | 235,0 | 160,0 | 200,0 | 4 | 18,0 | 4,0 | 32,0 | 160,0 | 155,0 | 154,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 143,5 | 342,0 | 548,0 | 466,0 | 473,0 |
| GR60_SMT_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 6,0 | 28,0 | 160,0 | 155,0 | 154,0 | 31,5 | 8,5 | 65,0 | | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 126,0 | 342,0 | 530,5 | 448,5 | 455,5 |
| GR60_SMT_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 14,5 | 6,0 | 38,0 | 160,0 | 155,0 | 154,0 | 41,8 | 10,5 | 83,0 | | 3" SAE-3000 | 3" GAS | 2" 1/2 SAE-3000 | 63,0 | 105,0 | 146,0 | 342,0 | 550,5 | 468,5 | 475,5 |
| GR70_SMT-16B | 600-660-800 | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 4,0 | 32,0 | 180,0 | 180,0 | 179,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 94,5 | 279,0 | 441,5 | 365,5 | 379,5 |
| GR70_SMT-16B_TM | | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 4,0 | 32,0 | 180,0 | 180,0 | 179,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 136,0 | 279,0 | 483,0 | 407,0 | 421,0 |
| GR70_SMT-16B_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 5,0 | 28,0 | 180,0 | 180,0 | 179,0 | 31,5 | 8,5 | 63,1 | | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 118,3 | 279,0 | 465,3 | 389,3 | 403,3 |
| GR70_SMT-16B_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 14,5 | 6,0 | 38,0 | 180,0 | 180,0 | 179,0 | 41,8 | 10,5 | 87,3 | | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 139,5 | 279,0 | 486,5 | 410,5 | 424,5 |
| GR70_SMT | 600-660-800 | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 4,0 | 32,0 | 180,0 | 180,0 | 179,0 | 35,0 | 10,0 | 60,5 | 55,0 | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 115,5 | 422,0 | 605,5 | 529,5 | 543,5 |
| GR70_SMT_TM | | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 4,0 | 32,0 | 180,0 | 180,0 | 179,0 | 35,0 | 10,0 | 65,5 | 55,0 | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 157,0 | 422,0 | 647,0 | 571,0 | 585,0 |

POMPE SMT E SMT-16B

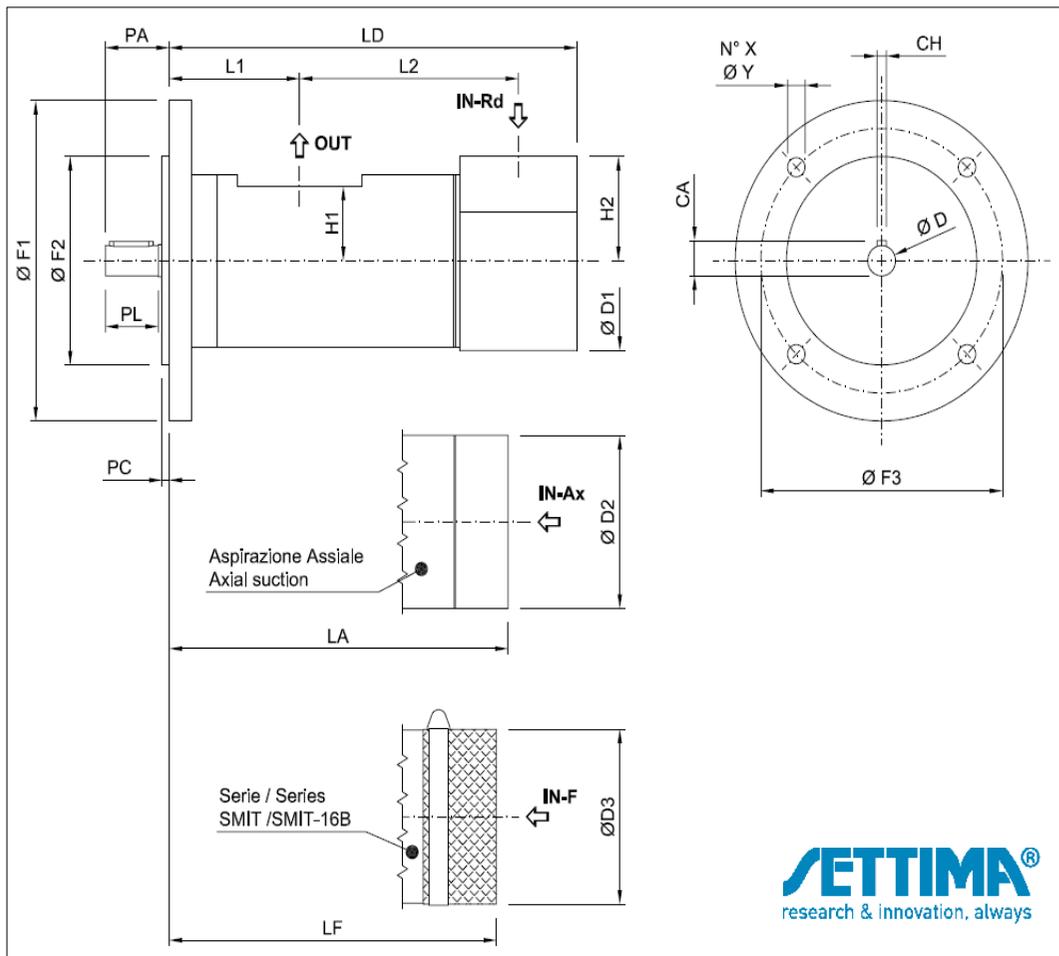

SETTIMA
research & innovation, always

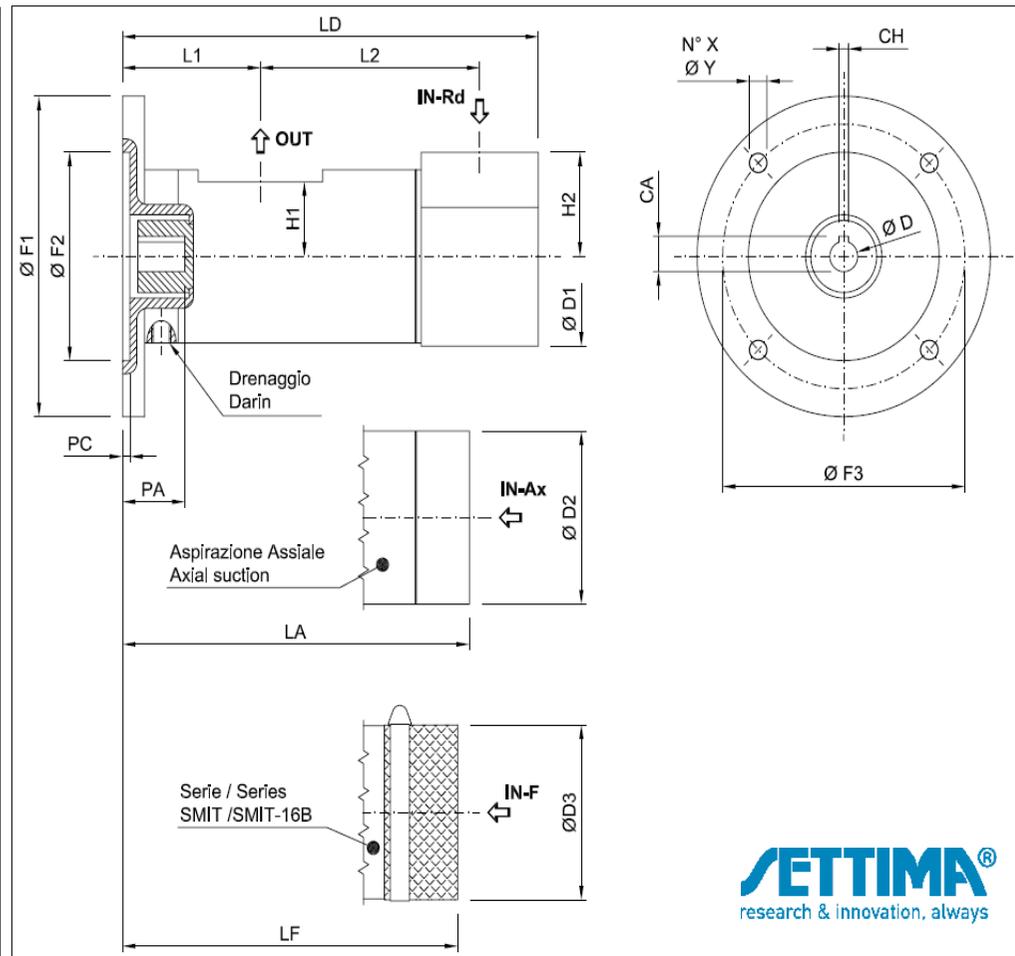

SETTIMA
research & innovation, always

| POMPA | L / Min. | F1 | F2 | F3 | X | Y | PC | D | D1 | D2 | D3 | CA | CH | PA | PL | IN-Rd | IN-Ax | OUT | H1 | H2 | L1 | L2 | LD | LA | LF |
|------------------|---------------------|-------|-------|-------|---|------|-----|------|-------|-------|-------|------|------|-------|-------|-----------------|-------------|-------------|-------|-------|-------|-------|-------|-------|-------|
| GR70_SMT_AC28-B5 | | 250,0 | 180,0 | 215,0 | 4 | 14,0 | 5,0 | 28,0 | 180,0 | 180,0 | 179,0 | 31,5 | 8,5 | 63,1 | | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 139,3 | 422,0 | 629,3 | 553,3 | 567,3 |
| GR70_SMT_AC38-B5 | | 300,0 | 230,0 | 265,0 | 4 | 14,5 | 6,0 | 38,0 | 180,0 | 180,0 | 179,0 | 41,8 | 10,5 | 87,3 | | 3" 1/2 SAE-3000 | 3" 1/2 GAS | 3" SAE-3000 | 73,0 | 110,0 | 160,5 | 422,0 | 650,5 | 574,5 | 588,5 |
| GR80_SMT-16B | 1000-1200 | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 4,0 | 38,0 | 210,0 | 210,0 | 204,0 | 41,0 | 10,0 | 75,0 | 60,0 | 4" SAE-3000 | 4" GAS | 3" SAE-3000 | 83,0 | 125,0 | 150,0 | 294,5 | 519,0 | 468,0 | 452,0 |
| GR80_SMT-16B_TM | | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 6,0 | 38,0 | 210,0 | 210,0 | 204,0 | 41,0 | 10,0 | 75,0 | 60,0 | 4" SAE-3000 | 4" GAS | 3" SAE-3000 | 83,0 | 125,0 | 203,0 | 294,5 | 572,0 | 521,0 | 505,0 |
| GR80_SMT | 1000-1200 | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 4,0 | 38,0 | 210,0 | 210,0 | 204,0 | 41,0 | 10,0 | 75,0 | 60,0 | 4" SAE-3000 | 4" GAS | 3" SAE-3000 | 83,0 | 125,0 | 150,0 | 470,5 | 695,0 | 644,0 | 628,0 |
| GR80_SMT_TM | | 300,0 | 200,0 | 250,0 | 4 | 22,0 | 6,0 | 38,0 | 210,0 | 210,0 | 204,0 | 41,0 | 10,0 | 75,0 | 60,0 | 4" SAE-3000 | 4" GAS | 3" SAE-3000 | 83,0 | 125,0 | 203,0 | 470,5 | 748,0 | 697,0 | 681,0 |
| GR90_SMT-16B | 1500-1700-2000-2200 | 350,0 | 250,0 | 300,0 | 4 | 26,0 | 5,0 | 55,0 | 250,0 | 250,0 | 251,0 | 59,0 | 16,0 | 118,0 | 110,0 | 5" SAE-3000 | 5" SAE-3000 | 4" SAE-3000 | 100,0 | 140,0 | 256,0 | 525,0 | 881,0 | 816,0 | 721,0 |
| GR90_SMT-16B_TM | | 350,0 | 250,0 | 300,0 | 4 | 26,0 | 5,0 | 55,0 | 250,0 | 250,0 | 251,0 | 59,0 | 16,0 | 118,0 | 110,0 | 5" SAE-3000 | 5" SAE-3000 | 4" SAE-3000 | 100,0 | 140,0 | 256,0 | 525,0 | 881,0 | 816,0 | 721,0 |
| GR110_SMT-16B | 2300-2500-2800-3200 | 350,0 | 250,0 | 300,0 | 4 | 26,0 | 5,0 | 55,0 | 250,0 | 250,0 | 251,0 | 59,0 | 16,0 | 118,0 | 110,0 | 5" SAE-3000 | 5" SAE-3000 | 4" SAE-3000 | 100,0 | 140,0 | 287,0 | 489,0 | 876,0 | 811,0 | 716,0 |
| GR110_SMT-16B_TM | | 350,0 | 250,0 | 300,0 | 4 | 26,0 | 5,0 | 55,0 | 250,0 | 250,0 | 251,0 | 59,0 | 16,0 | 118,0 | 110,0 | 5" SAE-3000 | 5" SAE-3000 | 4" SAE-3000 | 100,0 | 140,0 | 287,0 | 489,0 | 876,0 | 811,0 | 716,0 |